

DIGITAL WHEEL BALANCER

CEMB USA

K11



**Digital Wheel Balancer
for cars and light trucks**

Visit our website to see our complete
range of wheel balancers
and other products



VDD Virtual Direct Drive
(CEMB PATENT)

MWL Maximum Weight
Limit 165 LBS

2D Automatic Distance
and Diameter

SG Splash Guard



CEMB
Established 1946
USA since 1969

WWW.CEMB-USA.COM

DIGITAL WHEEL BALANCER



CEMB K11 BALANCING MACHINES

Digital wheel balancer for cars and light trucks

FEATURES

- Space saving wheel balancer with excellent technical specifications. Built on a sturdy structure with an attractive modern design.
- Direct selection Ounce or Gram
- Direct weight location program (no repositioning of stick-on weights)
- Automatic distance and diameter entry (2D)
- Splash guard

STANDARD (all CEMB balancers)

- One button split and hidden weight program
- Optimization program for compensation of rim and tire unbalance
- "Static" program - plus 5 ALU programs for alloy, PAX or special shaped rims
- Standard quick nut mounting

STANDARD ACCESSORIES


- Quick release wingnut with reverse mounting cup and no-mar ring
- 3 cones covering hole sizes 1.69" (43mm) to 4.33" (110mm)
- 3 pegs for storage
- Rim width gauge for measuring wheel width
- 40mm threaded shaft

OPTIONAL ACCESSORIES

- 2 piece truck cone kit fits hole from 3.82" (97mm) to 7.09" (180mm)
- 3 piece truck cone kit (same as above, but includes GG spacer ring) to fit Ford F-350, 450 and 550
- 8.5" super cone (for GMC 6500 series & International using 19.5" rims)
Note: must be used with 3 piece cone kit.
- RL cup (8.11" or 206mm for alloy rims (includes no-mar ring)
- SR-USA adaptor (for lug centric wheels)
- Universal bolt pattern adaptor (for wheels with 3-4-5 holes or w/out center hole)
- Motorcycle and ATV adaptor kit (Splash guard required)
- Wheel lift


TECHNICAL SPECIFICATIONS

- Power supply 110VAC
- Max. Power supply absorbed 0.03Kw
- Balancing speed < 100 rpm
- Balancing accuracy < 1 g
- Rim diameter 10" - 30"
- Rim width 1.5" - 20"
- Max wheel weight 165 lbs (75 Kg)
- Average cycle time 4 - 6 seconds
- Operating temperature 32° - 113°F (0° - 45°C)
- Shipping dimensions (L 26" x W 39" x H 45")
- Gross shipping weight 245 lbs

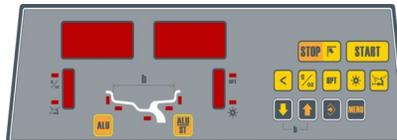

Manufacturer reserves the right to make any and all alterations it may consider suitable without notice

BALANCER FOOT PRINT

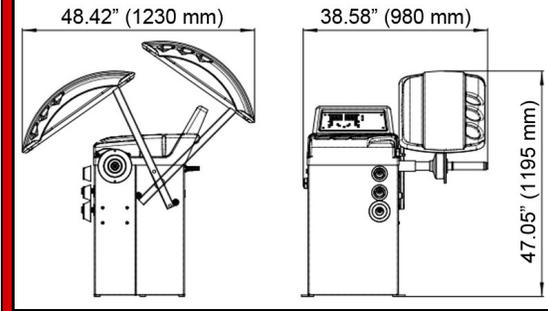

CEMB TECHNOLOGIES



All parts used to manufacture our machines are of the highest quality available. Only in this way is it possible to maintain constant accurate balancing over time.



VDD is a "new" Maintenance free Measuring system

Using the latest and most reliable Mechanical and electronic components. Technology coming from CEMB's Industrial balancing and vibration analysis division was used to develop this system, which out performs all competitors in speed, accuracy and endurance.

CEMB USA

BL Systems, Inc.

2873 Ramsey Road • Gainesville, GA 30501
Toll free 877-259-4335 • Office 678-717-1050
Fax 678-717-1056 • sales@cemb-usa.com

DISTRIBUTED BY

Related Models K10 • C71

CATK11-1

WWW.CEMB-USA.COM